

RECON-A

The Phoenix **RECON-A** is the ideal solution for reconnaissance mapping missions such as vegetation encroachment on power lines. This all-in-one payload offers ease of use and efficient data collection all at an affordable price point.

The **RECON-A** maximizes point cloud density by utilizing its multi-pattern laser to pick up even the lowest reflective points. The integrated 24 MP high resolution camera has the same FOV as the LiDAR sensor yielding maximum RGB colorization of the point cloud.

FEATURES

- Lightest unit in its class
- Multi-Pattern acquisition allows for high density data even with low reflectance



QUICK SPECS

Absolute Accuracy

3-6cm RMSEz @ 60m AGL⁽¹⁾⁽²⁾⁽⁴⁾

Intraswath Precision

6.5cm RMSDz @ 60m AGL⁽¹⁾⁽²⁾⁽³⁾

Weight

1.2 kg / 2.64 lbs

Dimensions

19.9 x 9.2 x 12.1 (cm)

Multi-Pattern Scanning

Repetitive line scan or

Non-repetitive scanning pattern

Max DJI M300 Flight time

35 Minutes

APPLICATIONS



Utilities Mapping



Construction Site Surveying



Agriculture & Forestry Monitoring



Open Pit Mining Operations



Stockpile Volumetrics



General Mapping

PLATFORM

| | |
|-----------------------------|--------------------------|
| OVERALL DIMENSIONS (Sensor) | 19.9 x 9.2 x 12.1 (cm) |
| WEIGHT | 1.2 kg / 2.64 lbs |
| CAMERA FOV | 70° |
| CAMERA RESOLUTION | 24MP |
| EXTERNAL STORAGE | 256GB USB drive included |
| OPERATING VOLTAGE | 12-28 V DC |
| OPERATING TEMPERATURE | -20°C – +40°C |

LiDAR SENSOR

| | |
|-------------------------|--|
| LASER PROPERTIES | 905 nm Class 1 (eye safe) |
| DISTANCE RANDOM ERROR | 1σ @ 20 m < 2 cm (80% Reflective) |
| RANGE MAX | 190 m |
| RANGE ACCURACY | ±2 cm |
| SCAN RATE | 240,000 points/s (first or strongest return) 480,000 points/s (dual return) 720,000 points/s (triple return) |
| FIELD OF VIEW (H x V) | Non-repetitive scanning pattern: 70.4° x 77.2° Repetitive line scanning: 70.4° x 4.5° |
| MAX RETURNS SUPPORTED: | 3 |
| BEAM DIVERGENCE (H x V) | 0.03° x 0.28° |


NAVIGATION SYSTEM

| | |
|-----------------------|-------------------------------------|
| CONSTELLATION SUPPORT | GPS+GLONASS+BEIDOU+GALILEO |
| SUPPORT ALIGNMENT | Kinematic |
| OPERATION MODES | Post-processing only |
| POSITION ACCURACY | 0.5 cm (PPK Estimated) |
| ATTITUDE ACCURACY | <0.01° Pitch & Roll; <0.05° Heading |


(1) Approximate values based on PLS test condition. (2) Using a 90° downward field of view. (3) Range of elevation values on flat surfaces with >20% reflectivity at the laser's wavelength.

(4) Expected RMSEz when following the PLS recommended acquisition & processing workflow and ASPRS check point guidelines.

RECON-A DIMENSIONS (mm)

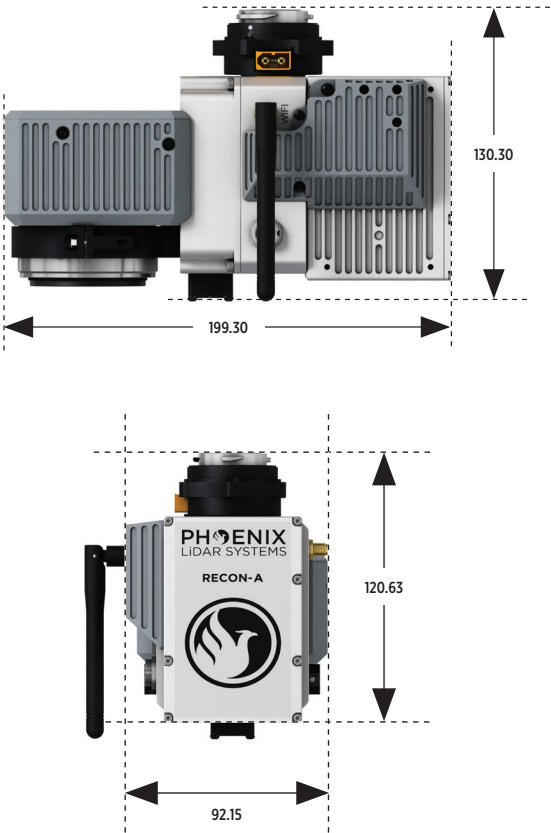

POINT DENSITY RECON-A

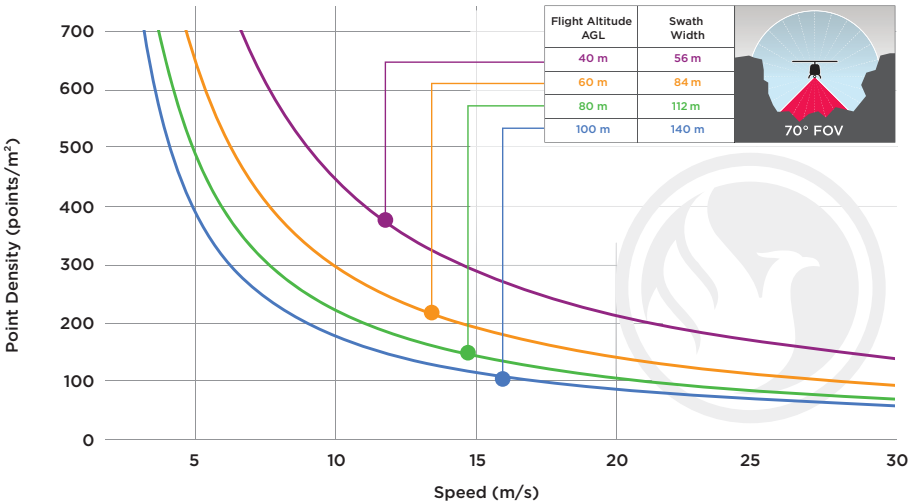



| Flight AGL (m) | 40 | 60 | 80 | 100 |
|----------------|--|---------|---------|---------|
| Speed (m/s) | Covered Area: 20% Flightline Overlap (ha/ac) | | | |
| 6 | 48/120 | 73/179 | 97/239 | 121/299 |
| 10 | 81/199 | 121/299 | 161/399 | 202/498 |
| Speed (m/s) | Covered Area: 50% Flightline Overlap (ha/ac) | | | |
| 6 | 30/75 | 45/112 | 60/149 | 76/187 |
| 10 | 50/125 | 76/187 | 101/249 | 126/311 |
| Imagery GSD | 0.98 cm | 1.46 cm | 1.95 cm | 2.44 cm |
| Swath Width | 56 m | 84 m | 112 m | 140 m |

RECON-A FOV / SCAN PATTERN

The RECON-A comes equipped with two scanning modes:



➤ NON-REPETITIVE PATTERN SCAN (70.4°)

The non-repetitive scan mode increases the vertical FOV to 77.2°. This is the preferred mode when scanning structures such as power line towers.



➤ REPETITIVE LINE SCAN (4.5°)

The repetitive scan pattern adjusts the vertical FOV to 4.5°. This is the preferred scan pattern for jobs that require the highest accuracy.



EXPLORE A PHOENIX LiDAR SYSTEM FOR YOUR TEAM, CONTACT US!

PhoenixLiDAR.com | sales@phoenixlidar.com | USA +1.323.577.3366